


**BATTERIES**

# CAM80



<b>Capacity</b>	80Ah	
<b>Voltage</b>	3.2 V nom	
<b>Cycle Life</b>	≥2000 Cycles	
<b>Internal Resistance</b>	≤1mΩ	
<b>Charging (Constant Current-Constant Voltage)</b>	Maximum Constant Charging Current	80A
	CC To CV Voltage	3.65V
<b>Discharging</b>	Maximum Constant Discharging Current	160A
	Discharging Cut-off Voltage	2.5V
	Pulse Discharge	640A@10s 320A@30s
<b>Charge time</b>	4 h nom, 1 h fast	
<b>Weight</b>	2.2±0.1kg	
<b>Dimensions</b>	173 L×46.9 W×132.5H mm	
<b>Charging Temperature</b>	0~45 °C	
<b>Discharging Temperature</b>	-20~50 °C	
<b>Ambient Humidity</b>	<70 %	
<b>Shell Material</b>	Aluminum alloy	

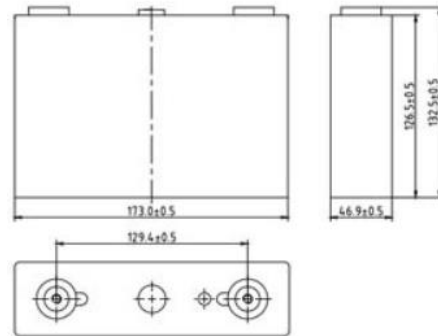