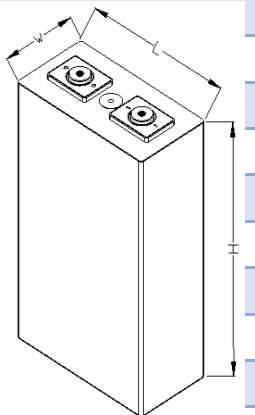


| Westart pouch | Chemicals | Nominal voltage | Capacity | Continuous discharge rate | Peak discharge rate | Continuous charge rate | Energy density | Capacity2 | Size W | Size L | Size H | Weight | Case material | Terminal bolt | Data sheet | Pic |
|---------------------------------|-----------|-----------------|---------------|---------------------------|---------------------|------------------------|----------------|-----------|---------|--------|---------|--------|-----------------|-----------------|------------|---|
| LS_Name | Chemicals | Nominal voltage | Capacity | Continuous discharge rate | Peak discharge rate | Continuous charge rate | Energy density | Capacity | | | Size | Weight | Case material | Terminal bolt | Data sheet | |
| | | V | Ah | | | | Wh/Kg | Ah | W | L | H | kg | | | | |
| WS-NCM10Ah | NCM | 3.7 | 10 | 2C | 3C | 0.5C | 223 | 10 | 9.5 | 60 | 158 | 0.188 | | stripes | Yes |  |
| WS-NCM30Ah | NCM | 3.7 | 30 | 2C | 5C | 0.5C | 230 | 10Ah | 9.2 | 133 | 200 | 0.51 | | stripes | Yes | |
| WS-NCM26.5Ah-HP | NCM | 3.7 | 26.5 | 8C | 12C | 3C | 135 | 26.5 | 11 | 181 | 245 | 0.75 | Plastic | stripes | Yes | |
| WS-NCM48Ah-HP | NCM | 3.7 | 48 | 5C | 8C | 3C | 214 | 48 | 11 | 190 | 245 | 0.89 | Plastic | stripes | Yes | |
| Westart standard modules | | | | | | | | | | | | | | | | |
| LS_Name | Chemicals | Nominal voltage | Capacity | Continuous discharge rate | Peak discharge rate | Continuous charge rate | Energy density | Capacity | | | Size mm | Weight | Case material | Terminal bolt | Data sheet | |
| | | V | Ah | | | | Wh/Kg | Ah | W | L | H | kg | | | | |
| WS-NCM90Ah | NCM | 3.7 | 90 | 2C | 5C | 0.5C | 200 | 30 | 29/30.5 | 141 | 252 | 1.95 | SUS304 steel | Male and female | Yes | |
| WS-NCM120Ah | NCM | 3.7 | 120 | 2C | 5C | 0.5C | 200 | 30 | 38/39.5 | 141 | 252 | 2.55 | SUS304 steel | Male and female | Yes | |
| WS-NCM150Ah | NCM | 3.7 | 150 | 2C | 3C | 0.5C | 200 | 30 | 50 | 141 | 252 | 3.4 | SUS304 steel | Male | Yes | |
| WS-NCM210Ah | NCM | 3.7 | 210 | 2C | 3C | 0.5C | 200 | 30 | 72 | 141 | 252 | 4.15 | Aluminium alloy | Female | Yes | |
| WS-NCM102Ah | NCM | 3.7 | 102 | 2C | | 0.5C | 235 | 34 | 29/30.5 | 135 | 218 | | SUS304 steel | Male and female | on demand | |
| WS-NCM136Ah | NCM | 3.7 | 136 | 2C | | 0.5C | 235 | 34 | 38/39.5 | 135 | 218 | | SUS304 steel | Male and female | on demand | |
| WS-NCM170Ah | NCM | 3.7 | 170 | 2C | | 0.5C | 235 | 34 | 50 | 135 | 218 | | SUS304 steel | Male | on demand | |
| WS-NCM238Ah | NCM | 3.7 | 238 | 2C | | 0.5C | 235 | 34 | 69 | 135 | 218 | | Aluminium alloy | Female | on demand | |
| WS-NCM120Ah_HD | NCM | 3.7 | 120 | 2C | | 0.5C | 240 | 60 | 33 | 163 | 242 | | Aluminium alloy | Female | on demand | |
| WS-NCM180Ah_HD | NCM | 3.7 | 180 | 2C | | 0.5C | 240 | 60 | 40.5 | 163 | 242 | | Aluminium alloy | Female | on demand | |
| WS-NCM152Ah_HD | NCM | 3.7 | 152 | 2C | | 0.5C | 240 | 76 | 27 | 190 | 252 | | Aluminium alloy | Female | on demand | |
| WS-NCM144Ah_HD | NCM | 3.7 | 144 | 2C | | 0.5C | 240 | 72 | 26 | 148 | 310 | | Aluminium alloy | Female | on demand | |
| WS-NCM156Ah_HD | NCM | 3.7 | 156 | 1C | | 0.5C | 260 | 82 | 26 | 148 | 310 | | Aluminium alloy | Female | on demand | |
| WS-LTO150Ah | LTO | 2.4 | 150 | 6C | | 3C | 90 | 50 | 31 | 270 | 218 | | Aluminium alloy | Female | on demand | |
| WS-LTO200Ah | LTO | 2.4 | 200 | 6C | | 3C | 90 | 50 | 41 | 270 | 218 | | Aluminium alloy | Female | on demand | |
| WS-LTO250Ah | LTO | 2.4 | 250 | 6C | | 3C | 90 | 50 | 51 | 270 | 218 | | Aluminium alloy | Female | on demand | |
| ETC batteries | | | | | | | | | | | | | | | | |
| Single module | | | Single module | | | | | | | | | | | | | |
| No. | Chemicals | Nominal voltage | Capacity | Continuous discharge rate | Peak discharge rate | Continuous charge rate | Energy density | Capacity | | | Size mm | Weight | Case material | Terminal bolt | Data sheet | |
| | | V | Ah | | | | Wh/Kg | Ah | W | L | H | kg | | | | |
| ETC-NCM42Ah | NCM | 3.7 | 42 | 1C | 3C 60s | 0.5C/1C | 180 | 42 | 27 | 98+10 | 149 | | Alu | female | | |
| ETC-NCM53Ah | NCM | 3.72 | 53 | 1C | 3C peak | 0.5C/1C | 210 | 53 | 27 | 102+10 | 149 | | Alu | female | | |
| ETC-NCM72Ah | NCM | 3.65 | 72 | 1C | 3C 60s | 0.5C/1C | 205 | 72 | 40 | 98+10 | 149 | | Alu | female | | |
| ETC-LFP86Ah | LFP | 3.2 | 86 | 1C | 3C 60s | 0.5C/1C | 125 | 86 | 48 | 128 | 174 | | Alu | female | | |
| ETC-LFP120Ah | LFP | 3.2 | 120 | 1C | 3C 60s | 0.5C/1C | 130 | 120 | 48 | 166 | 174 | | Alu | female | | |
| ETC-LFP176Ah | LFP | 3.2 | 176 | 1C | 3C 60s | 0.5C/1C | 140 | 176 | 54 | 200 | 174 | | Alu | female | | |
| ETC-LFP206Ah | LFP | 3.22 | 206 | 1C | 3C 60s | 0.5C/1C | 164 | 206 | 54 | 200 | 174 | | Alu | female | | |
| ETC-LFP240Ah | LFP | 3.2 | 240 | 1C | 3C 60s | 0.5C/1C | 150 | 240 | 72 | 207 | 174 | | Alu | female | | |
| ETC-LFP277Ah | LFP | 3.22 | 277 | 1C | 3C 60s | 0.5C/1C | 165 | 277 | 72 | 207 | 174 | | Alu | female | | |