
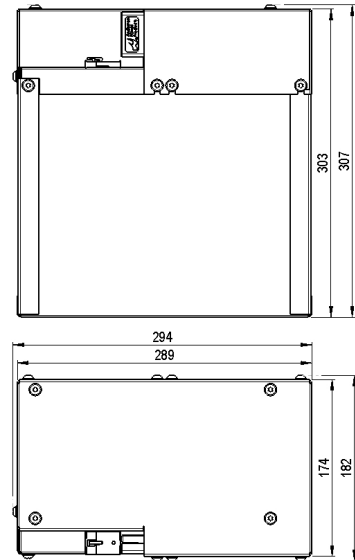


BATTERIES

WS-NCM150AH/24V

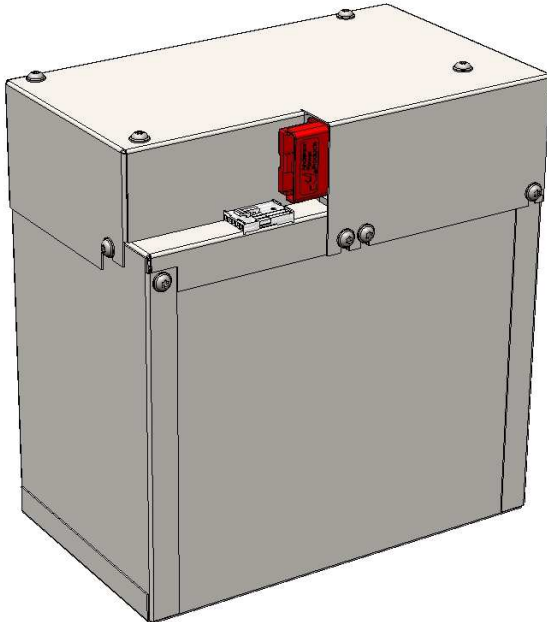

Nominal Capacity		150Ah
High energy density		130Wh/kg
Nominal Voltage		25.9V
Charging(CC-CV)	Charging Current	50A continuous / 100A peak
	Charging Upper Limit Voltage	29V (balancing starts @28.7V)
Discharging	Discharging Current	100A continuous / 240A peak
	Discharging Cut-off Voltage	21V
Charging Time	Standard Charging	3h
	Quick-acting Charging	1.5h (90%)
Operation Temperature	Charging	0°C ~ 45°C
	Discharging	-20° ~ 55°C
Cycle life		≥2000 cycles
Weight		30kg +/- 0.1kg
Size		H307 * L294 * W182 (+/-2mm)
Connectors: Anderson Power Products SB120 (600V) Plus & Minus 5-Pole Mini-Fit Jr. (Molex) 1. Red BMS+, 2. Orange BMS- 3.N/A, 4.&5. NTC(10kOhm)		