
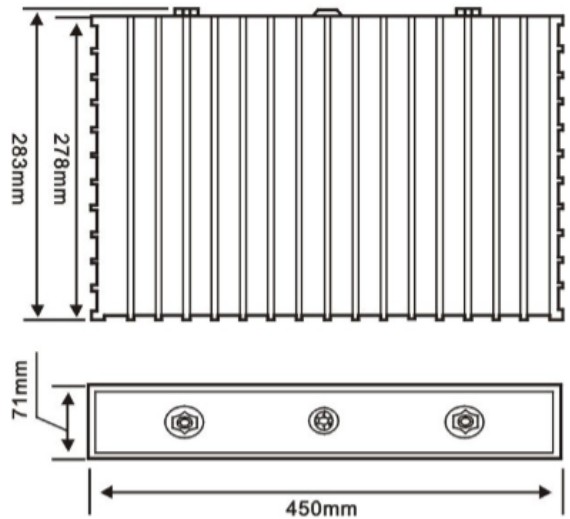


BATTERIES

SE400AHA

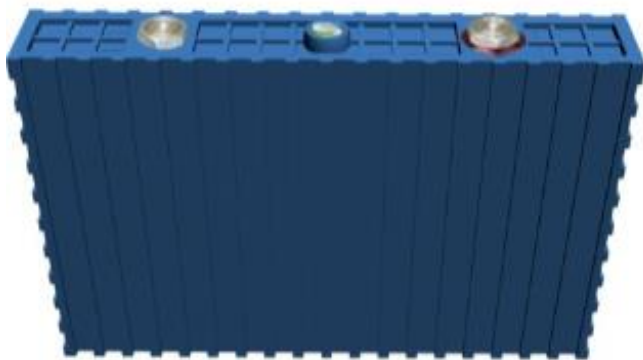

Nominal Capacity		400 Ah
Nominal Voltage		3.2 V
Internal Impedance (1kHz AC)		≤ 0.4 mΩ
Charging Cut-off Voltage (CCCV Model)		3.6 V
Discharging Cut-off Voltage		2.5 V
Recommend Charging-Discharging Current (0.3C,A)		120
Maximum short-tine Discharging Current (period ≤10s,A)		/
Life Cycle (0.3C Charging-discharging, 80%DDC)		2000
Operating Thermal Ambient	Charging	0 °C ~ 45 °C
	Discharging	-20 °C ~ 55 °C
Storage Thermal Ambient		-20 °C ~ 45 °C
Weight (kg)		14.3 kg (±0.1kg)
Shell Material		Plastic

Nennkapazität	400AH
Nennspannung	3,2V
max. Entladestrom	2,5C (=1.000A)
Dauer Entladestrom max	1C (=400A)
Ladestrom max	1C (=400A)
Ladetemperatur	0°C - 45°C
Entladetemperatur	-20°C - 55°C
Gewicht	14,3Kg (ca.)

